

产品特点:

- ✓ 小体积 127*115*35mm
- ✓ 高可靠性
- ✓ 使用 TS-35/7.5 或 TS-35/15 安装, 便于生产维护
- ✓ 效率 88%以上, 低损耗
- ✓ 并联冗余功能 (可选)
- ✓ 150%的峰值带载能力
- ✓ 内置 DC OK 和远程隔离信号输出
- ✓ 符合环保要求 RoHs6

Features:

- ✓ Small size 127 * 115 * 35mm
- ✓ High Reliability
- ✓ Use TS-35/7.5 or TS-35/15 for easy production and maintenance
- ✓ 88% efficiency, low loss
- ✓ parallel redundancy (optional)
- ✓ 150% peak load capacity
- ✓ Built-in DC OK and remote isolated signal output
- ✓ Comply with RoHs6

应用领域:

- ✓ 工业控制
- ✓ 清洁能源
- ✓ 轨道交通
- ✓ 生产制造
- ✓ 对尺寸大小、环境要求十分严酷的场合
- ✓ 对寿命、可靠性要求很高的供配电系统

Application:

- ✓ Industrial control
- ✓ Clean energy
- ✓ Track and traffic
- ✓ Production and Manufacturing
- ✓ It is very harsh on the size and use environment
- ✓ System with high requirements for lifetime and reliability

EDF-T120-24

产品规格书

PRODUCT SPECIFICATION

制造安全产品 驱动绿色世界 Power a Safe and Green world

Excellent 卓越 Creative 创造 United 协作



合肥华耀电子工业有限公司
ECU ELECTRONICS INDUSTRIAL CO.,LTD.



微信扫码关注

电话 TEL 4006659997/0551-62731110
传真 FAX+86-551-65324417 转 0

安徽省合肥市高新区天智路 41 号
No.41 TianZhi road P.O BOX 9023-
20,Hefei China

<http://www.ecu.com.cn>
<http://www.ecupowersupply.com>
sales@ecu.com.cn

基本参数 Basic Parameter

| 项目 Item | 单位 UNIT | 规格 Specification | 备注 Notes |
|--|------------|---------------------|--|
| 产品输入输出类型 Input and output type | | A+D | A) AC-DC; B) AC-AC; C) DC-AC; D) DC-DC; |
| 产品工作原理类属 Working principle | | A | A) 开关电源; B) 线性电源 A) Switching power supply; B) Linear power supply |
| 输出电压 Output Voltage | V | 24 | |
| 额定功率 Total Rated Power | W | 120 | |
| 峰值功率 Total Peak Power | W | 180 | 5 seconds |
| 效率 Efficiency | % | 88 | 400Vac/50Hz, 额定负载, 0.5h后测试; Run the test after 0.5 hours at Full Load; |
| 功率因数校正 Power factor correction | | C | A) 主动式 active PFC; B) 被动式 Passive PFC; C) 无 No |
| 纹波&噪声 Ripple Noise | mVp-p | 100 | 详见备注 See the note |
| 产品认证标志 Industry and regional certification mark | | 1、6 | 0 无、1 CE、2 CCC、3 CQC、4 TUV、5 UL、6 CB、7 TUVul、8 CSA、9 FCC、10 KC、11 GL、12 ATEX、13 IECEx、14 CUL、15 其它 |

1. 输出纹波噪声测试条件/DC output ripple & noise test conditions:

- 示波器须设置在 20M 赫兹带宽/Oscilloscope should be limited at 20MHz bandwidth;
- 将 0.1uF 的陶瓷电容和 47uF 的电解电容并联在线材末端/ Connect 0.1uF ceramic capacitors and 47uF electrolytic capacitors in parallel at the end of the wire;
- 使用 300mm 的双绞线连接电源和负载/ Connect the load and power supply with a 300mm twisted pair;
- 在负载端进行测试/ Testing is done on the load port;
- 若无特殊说明, 以上规格参数均在输入电压范围为 320-575Vac, 温度范围 25°C 的环境下测量。/ Unless otherwise specified, the above specifications are measured in the input voltage range of 320~575Vac and the temperature range of 25 ° C.2. "/>: 不符合项 " / ": No function;

输入特性: Input Characteristics:

| 项目 Item | 单位 UNIT | 最小值 MIN | 额定值 Rated | 最大值 Max | 备注 Notes |
|---------------------------------|------------|------------|--------------|------------|---|
| 输入电压类型 Power supply type | | | A+C+D | | A) 三相供电; B) 单相供电; C) 双相供电; D) 直流供电; E) 其它不规则供电 A) Three-phase; B) Single-phase; C) Dual phase; D) DC power supply; E) Other power supply |
| 输入电压 Input Voltage | Vac | 320 | 400 | 575 | 两相 2-Phase 参考输出降额曲线 Refer to output derating curve. |
| | Vac | 360 | 400 | 575 | |
| | Vdc | 450 | / | 800 | |
| 输入频率 Input Frequency | Hz | 47 | 50 | 63 | |
| 输入电流 Input Current | A | | | 0.5 | 400Vac, 满载 Full load. |
| | | | | 0.4 | 500Vac, 满载 Full Load. |
| 输入冲击电流 Inrush Current | A | | | 30 | 400Vac, 满载, 冷机启动 Full Load. cold start. |
| 输入冲击电流方案 Inrush Current mode | | | B | | A) 主动式 active; B) 被动式 Passive; C) 单电阻 Only Resistance; D) 无 NO |
| 功率因数 Power Factor | / | 0.5 | / | / | 400Vac, 满载 Full Load. |
| | | 0.45 | | | 500Vac, 满载 Full Load. |
| 空载损耗 No-load loss | W | | | 5 | 400Vac, 空载 No Load @ Vout=24V |

| | |
|--------------------|--------------|
| 输入保险 Input Fuse | 3*T2A/500Vac |
|--------------------|--------------|

"/": 不符合项 "/" : No function;

输出特性: Output Characteristics:

| 项目 Item | 单位 Unit | 最小值 Min | 典型值 Typ | 最大值 Max | 备注 Notes |
|---|------------|------------|------------|------------|---|
| 标准输出电压 Output Voltage | Vdc | | 24 | | |
| 输出电压可调范围 Adjustable range | Vdc | 23 | | 28.5 | |
| 额定输出电流 Rated current | A | 0 | | 5 | 24V输出Output@24V |
| 峰值输出电流1 Output Peak Current1 | A | | | 5.5 | 参考降额曲线Ref to derating curve |
| 峰值输出电流2 Output Peak Current2 | A | | | 7.5 | 24V输出Output@24V |
| 峰值功率持续时间1 Peak Power duration1 | s | / | / | / | 参考降额曲线Ref to derating curve |
| 峰值电流持续时间2 Peak Current duration2 | s | | | 5 | 5秒后, 电源将进入恒流模式, 详见峰值功率图及限流特性图 The power supply will enter constant current mode after 5 Seconds; see peak current figure and current limiting characteristic for details |
| 负载调整率 Load Regulation | / | / | / | +/-1 | 400Vac 0% load ~ 100% load 最小负载到额定负载 |
| 输入电压调整率 Line Regulation | % | | | +/-0.5 | 320Vac~575Vac 100% load 额定负载 |
| 温度调整率 Temperature Regulation | % | | | +/-0.07 | +/-0.07% @ 0°C~+60°C; +/-1% @ -25°C~0°C&+60°C~+70°C; +/-2.5% @ -40°C~-25°C; |
| 电压误差 Voltage Tolerance | % | | | +/-2 | -25°C~+70°C |
| 开机延迟时间 Setup Time | s | | | 2 | 400Vac 100% Load 额定负载 |
| 上升时间 Rise Time | ms | | | 200 | 输出从10%上升到90%的时间 The output voltages shall rise from 10% to 90% of their output voltage. |
| 保持时间 Hold time | ms | 20 | | | 400Vac, 满载Full Load. |
| | ms | 20 | | | 500Vac, 满载Full Load. |
| 过冲响应 Overshoot & undershoot Response | % | | | +/-5 | 开关机时 Power on/off |
| 负载动态 Load dynamic response | % | | | +/-5 | 设定周期20ms, 升降电流0.1A/us, 在10%~90%负载 Settling time 20ms R/s 0.1A/us load 10%~90% load |
| 串联 Connection in Series | V | | | | 详见附件 See Appendix |
| 并联冗余功能 Parallel Connection | A | | | | 详见附件 See Appendix |

"/": 不符合项 "/" : No function;

环境特性 Environment Characteristics

| 项目 ITEM | 单位 UNIT | 最小值 MIN | 典型值 Rated | 最大值 MAX | 备注 Notes |
|-------------------|------------|------------|--------------|------------|--|
| 温度 Temperature | °C | -25 | 25 | 70 | 工作温度Operation Temperature; 55°C~70°C以上需降额使用, 参考降额曲线; -40°C启动; |

| | | | | | |
|-------------------------------------|---|---|----|-----|---|
| | | | | | 55°C~70°C Refer to derating curve; -40°C start up |
| | | -40 | 25 | 85 | 贮藏温度Storage Temperature |
| 相对湿度 Humidity | % | 5% | RH | 95% | 工作湿度Operation Humidity |
| | | 5% | RH | 95% | 贮藏湿度Storage Humidity |
| 振动 Vibration | | 幅度<15Hz, ±2mm (IEC 60068-2-6) /15Hz...150Hz, 2.3g, 90分钟 < 15Hz, amplitude ±2.5mm(acc. to IEC 60068-2-6) / 15Hz ... 150Hz,2.3g, 90 min. | | | |
| 冲击 Impact | | 30g, 各个方向 (IEC 60068-2-27) 30g, each direction(acc. to IEC 60068-2-27) | | | |
| 海拔高度 Altitude | m | ≤3000m, 3000m以上降额使用, 15%load/Km, 最高海拔5000m ≤3000m, derated over 3000m, 15% load/Km, max altitude 5000m | | | |
| 冷却方式 Cooling Mode | | 空气自然冷却 Air Cooling | | | |
| 防护等级 IP level | | IP20 | | | |
| 污染等级 Pollution level | | PD2 | | | |
| RoHS环境指令 | | 符合Compliant | | | |
| 阻燃等级 (外壳) Flame retardant rating | | UL94V-0 | | | |
| 船级社 DNV GL | | / | | | |

"/": 不符合项 "/" : No function;

保护功能 Protection Function

| 项目 Item | 技术要求 Requirement | 恢复方式 Recovery mode | 保护方式 Protection mode | 注释 Notes |
|---|--|-----------------------|-------------------------|--|
| 输出短路保护 Output Short Circuit Protection | 短路保护时间大于等于60秒/Short Circuit Protection time is above of 60s.电源无损坏, 关闭输出电压 No damage shut down O/P voltage | A | B | 恢复方式Recovery mode: A) 自动恢复Auto Recovers; B) 重启恢复Restart; |
| 输出过流保护 Output Over current Protection | 155%~170% @ Io | A | B | |
| 输出过压保护 Output Over voltage Protection | 120%~170% @ Vo | A | C | 保护方式Protection mode: A) 恒功率Constant power; B) 恒电流Constant current; C) 输出掉电 Output voltage drop; |
| 过温保护 Over Temperature Protection | 关闭输出电压 Shut down O/P voltage. | A | C | |

"/": 不符合项 "/" : No function;

特殊功能 Signals Function

| 项目 Item | 技术要求 Requirement |
|-----------------------|---|
| 面板显示 Panel display | 当输出指标正常时, 绿色LED常亮/Output voltage≥21.6V, Green LED is always on; |
| 远程信号 Remote signal | 与输出隔离, 常开触点; 当输出电压大于85%时, DC OK为低阻抗≤50mΩ, 最大耐受直流30 V / 1 A/ Normally open contact, isolated output,; Output voltage≥85%V, DC OK is a low impedance ≤ 50mΩ, Max DC 30 V / 1 A |

"/": 不符合项 "/" : No function;

电气安全 Electrical Safety

| 项目 | 测试方法 | 测试条件 |
|----|------|------|
|----|------|------|

| Item | Test Method | Test Conditions |
|---|---------------------------|---|
| 高压测试 Hi-pot Test | 输入-输出 I/P-O/P | 4242Vdc. 60s, ≤1mA |
| | 输入-大地 I/P-PE | 2121Vdc. 60s, ≤1mA |
| | 输出-大地 O/P-PE | 700Vdc. 60s, ≤1mA |
| 绝缘阻抗 Withstand Resistance | 输入-输出 I/P-O/P | 500VDC. ≥ 5MΩ |
| | 输入-大地 I/P-PE | 500VDC. ≥ 5MΩ |
| | 输出-大地 O/P-PE | 500VDC. ≥ 5MΩ |
| 泄露电流 Leakage Current | L1、L2、L3-外壳/L1、L2、L3-Case | 3.5mA Max |
| | L1、L2、L3-PE/L1、L2、L3-PE | 3.5mA Max |
| 接地阻抗 PE Resistance | PE-外壳/PE-Case | < 0.1Ohm |
| 过电压等级 Overvoltage category | III, II | III (IEC 61010-1, IEC 61010-2-201, EN 62368-1, EN 61558-2-16) II (EN 62368-1, EN 60335-1) |
| 电气设备安全等级类别 Electrical equipment safety class | A | A)一类设备Class I ;B)二类设备Class II ;C)三类设备 (最高标称电压不超过50Vac或120VDC, 以及不属于AB) Class III; EN 61140, GB/T17045 |
| 安规标准 Safety | / | UL1310 (CLASS II产品) |
| | / | EN62368-1, GB4943.1 资讯类 |
| | / | EN60601-1, GB9706.1 医疗类 |
| | / | EN61347-1, EN61347-2-13, GB7000.1, GB19510.1, GB 19510.14 灯具类 |
| | / | EN60335-1, EN60335-2-29, GB4706.1 家电类 |
| | / | EN61010, GB4793.1 工控类 |

1) “/”: 不符合项 “/”Non-conformance;

电磁兼容 Electromagnetic Compatibility

| 项目 Item | 测试方法 Test Method | 测试条件 Test Conditions |
|--|------------------------------|---|
| 静电ESD Electrostatic Discharge | IEC 61000-4-2 GB17626-2 | Criteria A; Air Discharge: ±8kV; Contact Discharge: ±4kV |
| 射频辐射RS Radiated Field | IEC 61000-4-3 GB17626-3 | Criteria A; 80-1000MHz, 10V/M, 80% modulation (1kHz); |
| 脉冲杂讯EFT Electrical Fast Transient / Burst | IEC 61000-4-4 GB17626-4 | Criteria A; ±4kV |
| 雷击 Surge | IEC 61000-4-5 GB17626-5 | Criteria A; Common Mode: 4kV; Differential Mode: 2kV |
| 射频传导 Conducted Emission | IEC 61000-4-6 GB17626-6 | Criteria A; 0.15-80MHz, 10Vrms, 80% modulation (1kHz) 80MHz-1GHz, 10Vrms, 80% modulation (1kHz) 1.4GHz-2GHz, 10Vrms, 80% modulation (1kHz) 2GHz-2.7GHz, 10Vrms, 80% modulation (1kHz) |
| 电源磁场 Power Frequency Magnetic Fields | IEC 61000-4-8 GB17626-8 | 30A/meter, Criteria B |
| 脉冲磁场抗扰度试验 Impulse Magnetic Field Immunity Test | IEC 61000-4-9 GB17626-9 | 300A/meter, Criteria B |
| 阻尼振荡磁场抗扰度试验 Damped Oscillatory Magnetic Field Immunity Test | IEC 61000-4-10 GB17626-10 | 100A/meter 100KHz and 100MHz, Criteria B |
| 电压瞬断 Voltage Dips And Interruptions | IEC 61000-4-11 GB17626-11 | Voltage Dips >95% reduction, 0.5 period Criteria A |
| | | Voltage Dips >30% reduction, 25 period Criteria B |

| | | | |
|--|-------------------------------|---|------------|
| | | Voltage interruptions >95% reduction,250 period | Criteria B |
| 低能量脉冲 Low Energy Pulse Test (Ring Wave) | IEC 61000-4-12 GB17626-12 | Criteria B Common Mode:2kV; Differential Mode: 1kV | |
| 谐波 Harmonic Current Emission | IEC/EN 61000-3-2 GB17625-1 | Class A | |
| 电磁耐受标准 Immunity Generic Standards | / | EN 55024,GB17618 资讯类 Information technology | |
| | / | EN55014-2 家电类 Household appliances | |
| | / | EN60601-1-2 医疗类 Medical | |
| | / | EN61547 灯具类 Lamps | |
| | | EN61000-6-1,EN50082-1,GB/T17799-1 轻工业环境 Light industry environment | |
| 传导和辐射通用标准 CE&RE | | EN 61000-6-2,EN55082-2,GB/T17799-2 工业环境 Industry environment | |
| | / | GB9254, CISPR 32, EN 55032 : Class B 资讯类 Information technology | |
| | / | GB4824, CISPR 11, EN 55011 : Class B 医疗类 Medical | |
| | / | GB17743, EN55015, CISPR15: Class B 灯具类 Lamps | |
| | | GB4343-1, CISPR14, EN55014-1: Class B 家电类 Household appliances | |
| 电压波动和闪烁 Voltage Fluctuation and Flicker | | EN 61000-6-3, FCC Title 47, EN55011: Class B 工控类 Industrial control | |
| | | IEC/EN 61000-3-3, GB17625.2; Criteria B | |

- 1) 标准A: 规格界限内正常性能 Criteria A: Normal performance within the specification limits;
- 2) 标准B: 可自行恢复的临时性退化或功能丧失 Criteria B: Temporary degradation or loss of function which is self-recoverable;
- 3) 标准C: 不可自行恢复的临时性退化或功能丧失, 必须重新启动后才能恢复正常工作 Criteria C: Need to restart the power supply, to return to normal work;
- 4) 标准D: 永久性退化或功能丧失, 需要更换零部件或维修人员介入 Criteria D: Permanent degeneration or loss of function;
- 5) 不对称: 共模 (线对地) Asymmetrical: Common mode (Line to earth);
- 6) 对称: 差模 (线对线) Symmetrical: Differential mode (Line to line);
- 7) “/”: 不符合项 “/” Non-conformance;
- 8) 电源应视为系统内元件的一部分, 需结合终端设备进行EMC确认 Power should be considered part of the element within the system, to be combined with the terminal device EMC acknowledgment;

可靠性数据 Reliability

| 项目 Item | 数据 Data | 测试条件 Test Conditions |
|-----------------|-------------|---------------------------------|
| 产品老化 Burn-in | 100% | 400Vac, 满载, 40°C±5°C, 4小时 |
| 平均无故障时间 MTBF | 200000H Min | 400Vac, 满载, 25°C, MIL HDBK 217F |

“/”: 不符合项 “/” Non-conformance;

结构与安装 Mechanical Installation

| 项目 Item | 数据 Data | 备注 Note |
|----------------------|--|---------------------|
| 尺寸mm (长宽高) Size | 127 * 115 * 35 | 材质: 铝; Housing : AL |
| 重量Kg Weight | 0.5 | |
| 安装方式 Installation | 导轨式安装 mounted on 35mm DIN rails | TS-35/7.5或TS-35/15 |
| 最小间距 Space | 上下(above/below): 45mm; 左右(left and right side): 0mm,5mm with a heat source | |

| | | |
|------------------------------------|---------------------------------|--|
| 输入端子 Input Terminal | 脚距10.0mm, 4位/Pitch=10.0mm, 4pin | 直插式连接Push-In Terminal; |
| | 1 PIN---FG | 硬导线横截面Hard wire cross section 0.2 mm ² ... 4 mm ² ; |
| | 2PIN---L3 | 柔性导线横截面Flexible wire cross section 0.2 mm ² ... 2.5 mm ² |
| | 3PIN---L2 | 横截面Cross section AWG 24 ... 12 |
| | 4PIN---L1 | 剥线长度Strip length 10 mm |
| 输出端子 Output Terminal | 脚距5.0mm, 4位/Pitch=5.0mm, 4pin | 直插式连接Push-In Terminal; |
| | 1 PIN---V- | 硬导线横截面Hard/Flexible wire cross section 0.2 mm ² ... 6 mm ² |
| | 2 PIN---V- | 横截面Cross section AWG 24 ... 8 |
| | 3 PIN---V+ | 剥线长度Strip length 14mm-15 mm |
| | 4 PIN---V+ | |
| 输出DC OK端子 Output DC OK Terminal | 脚距5.0mm, 2位/Pitch=5.0mm, 2pin | 直插式连接Push-In Terminal; |
| | 5 PIN---DC OK+ | 硬导线横截面Hard wire cross section 0.2 mm ² ... 4 mm ² ; |
| | 6 PIN---DC OK- | 柔性导线横截面Flexible wire cross section 0.2 mm ² ... 2.5 mm ² 横截面Cross section AWG 24 ... 12 剥线长度Strip length 10 mm |

附件 (安装示意图、降额曲线、典型应用、导轨安装方法)

Appendix(Product assembly/Derating curve/Typical application/Din track mounting)

1. 产品装配示意图 Product assembly

说明:


Note:

A: 产品名称特性示意, 具体参数依照规格书。


A: Refer to product specifications.

B: 建议扭矩:M3.0螺钉<0.4 N·m; M4.0螺钉<0.6 N·m。

B:Suggested tightening torque:M3.0 screw < 0.4 N·m;M4.0 screw < 0.6 N·m.

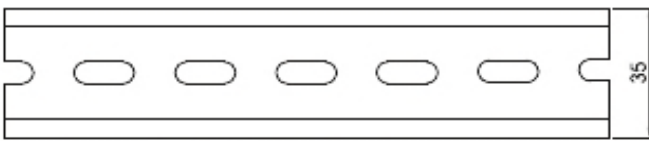

Install rail / 安装轨道: TS35/7.5 or TS35/15

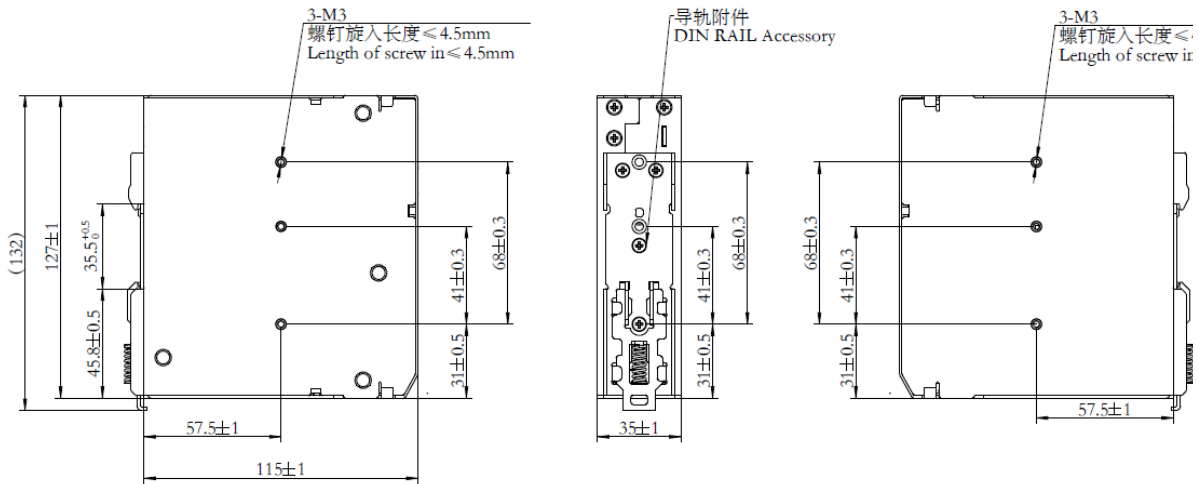

2. 降额曲线 Derating curve:

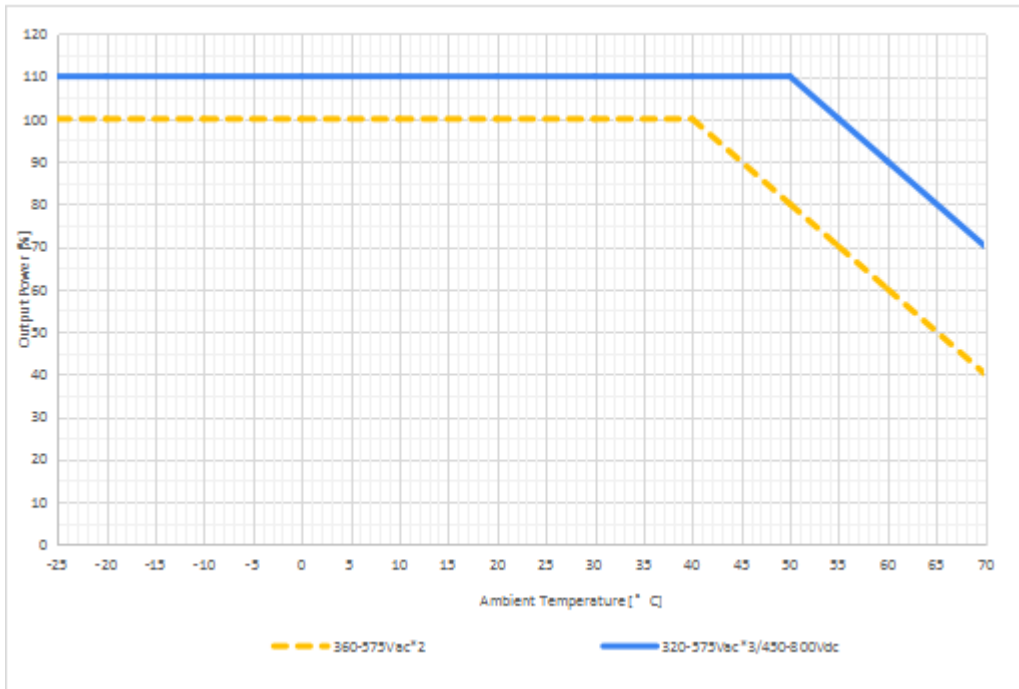


图1: 环境温度和输入电压下输出功率降额曲线

Fig1: Output Power Derating curve depending on Ambient Temperature and Input Voltage

3. 限流特性 Current Limiting Characteristic

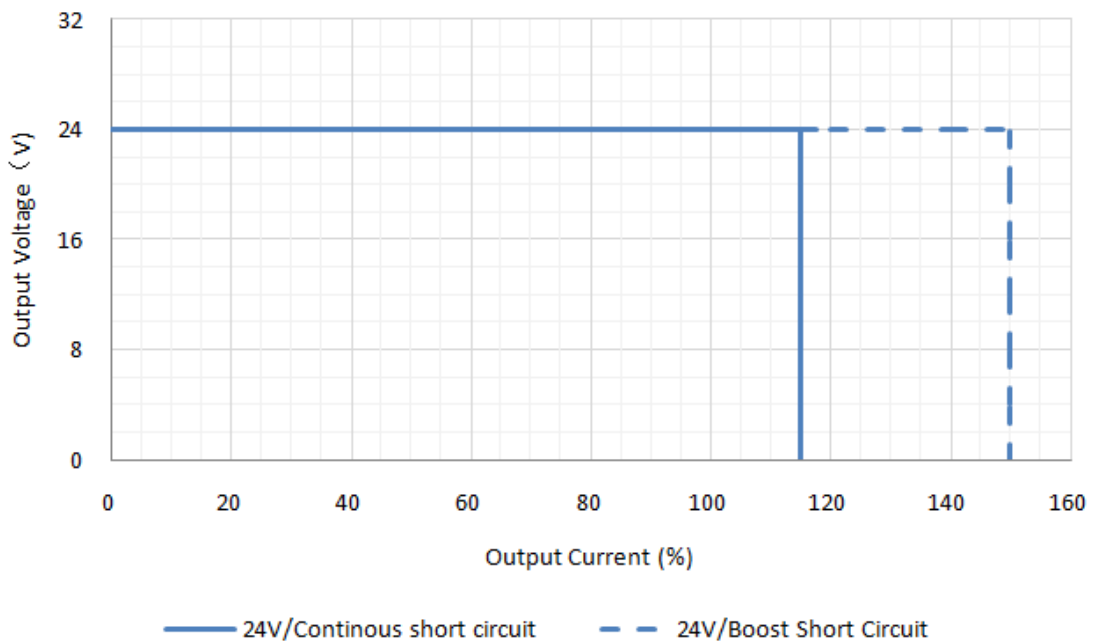


图1: 正常输出电压下, 正常和峰值工作时的限流曲线

Fig 1: Current limiting curve in normal and Boost operation depending on the nominal output voltage

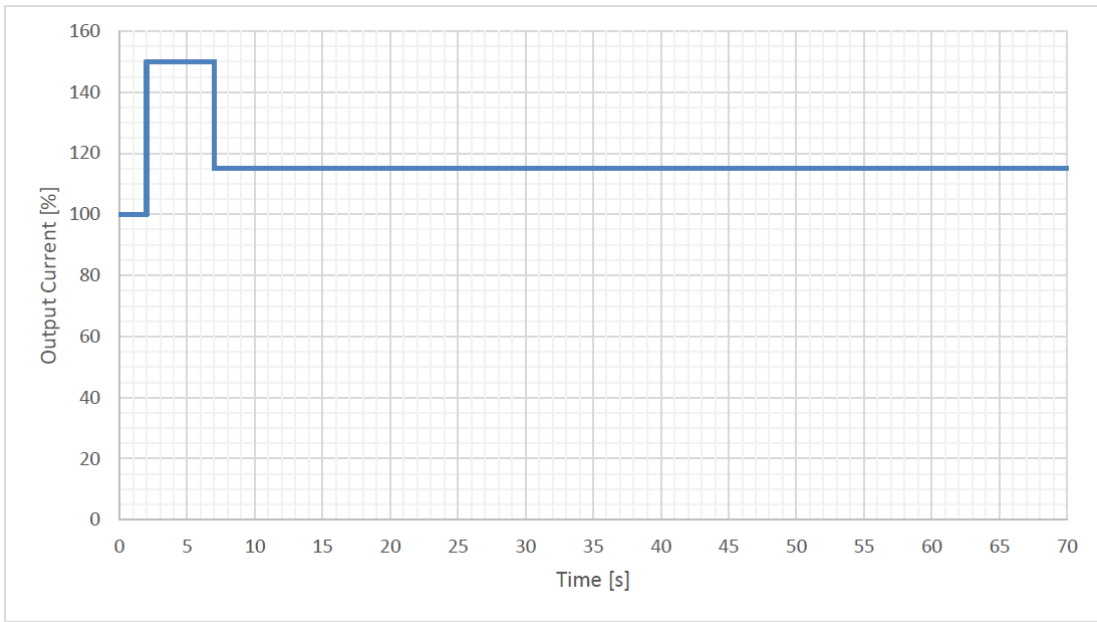


图2:短路情况下, 非重复的峰值电流特性

Fig 2: Non-repetitive Boost during continuous short circuit

4. 峰值功率特性 Boost Characteristic

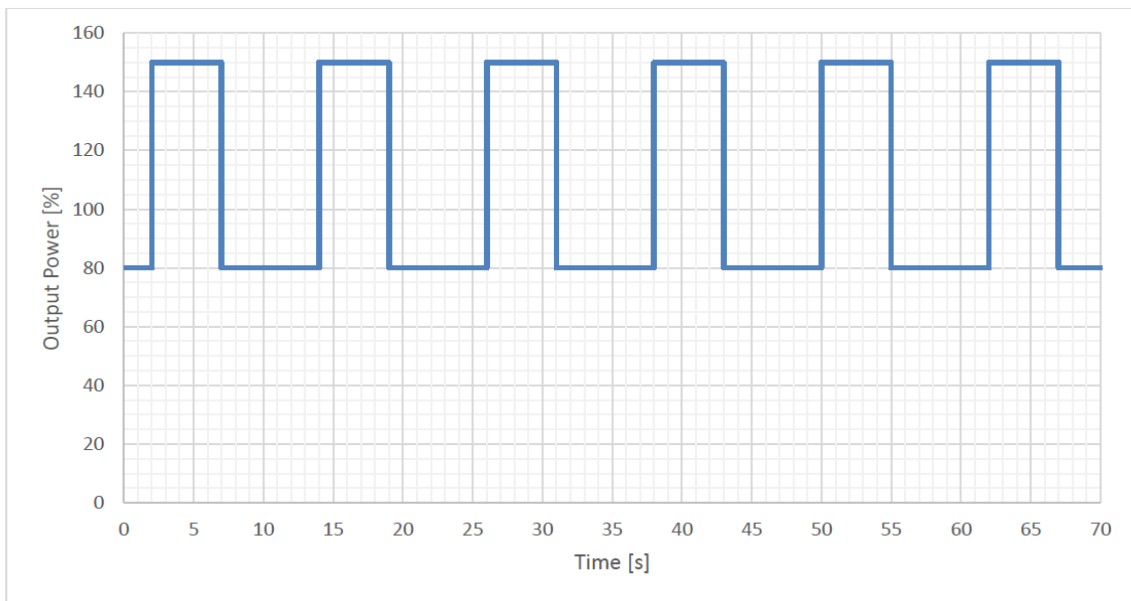


图1: 环温50°C情况下 (80%→150%输出功率), 峰值功率时间5s

Fig 1: Timing between two Boost events for 5s at 50°C ambient (80%→150% output power)


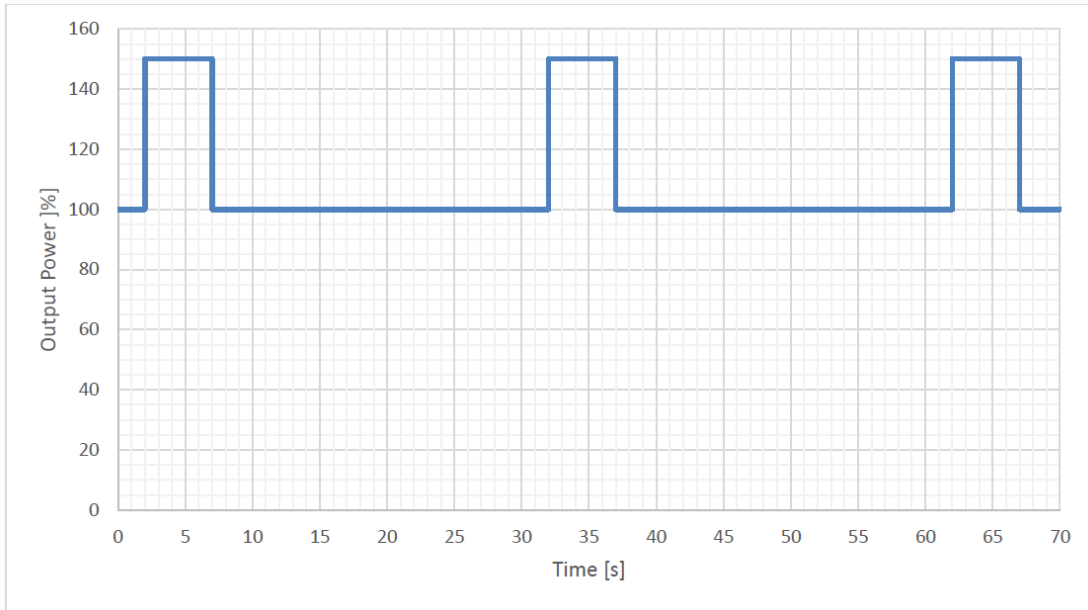



图2: 环温50°C情况下 (100%→150%输出功率), 峰值功率时间5s
 Fig 2: Timing between two Boost events for 5s at 50°C ambient (100%→150% output power)

5. 典型应用 Typical application:


3.1 串联接线图 Series Operation Connection Diagram:

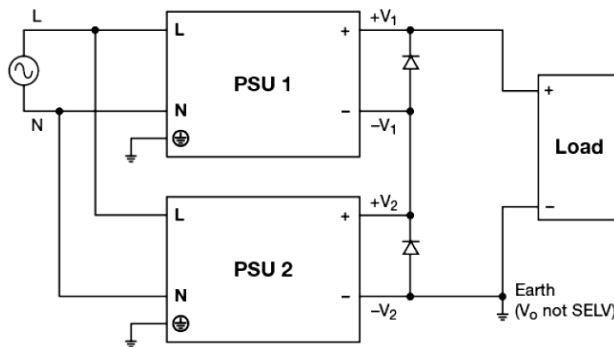


3.2 1+1 冗余接线图 1+1 Redundancy Connection Diagram

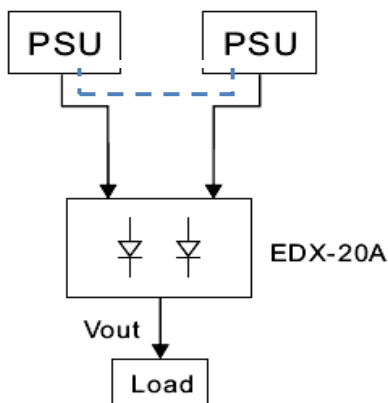

3.3 1+N 冗余接线图 1+N Redundancy Connection Diagram:

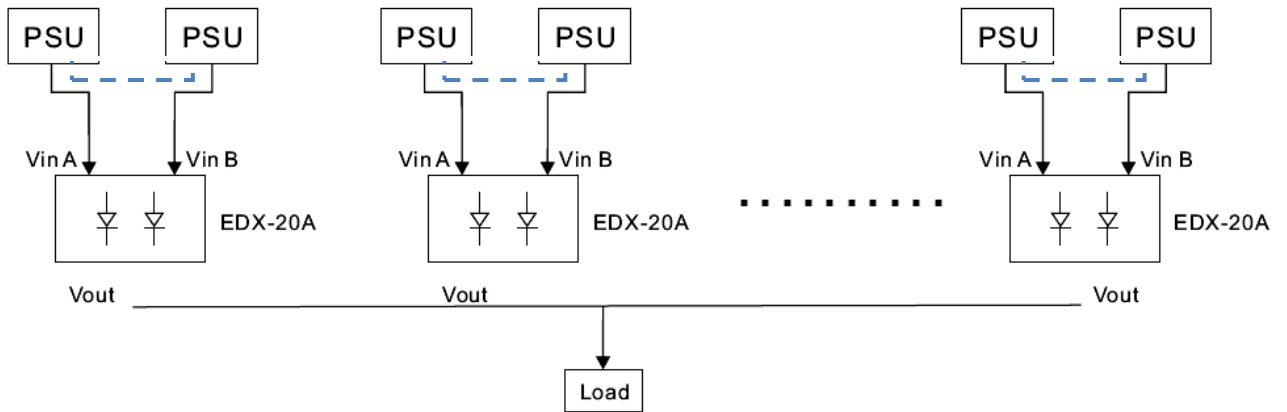


3.4 可靠性系统构建图 Reliability system:

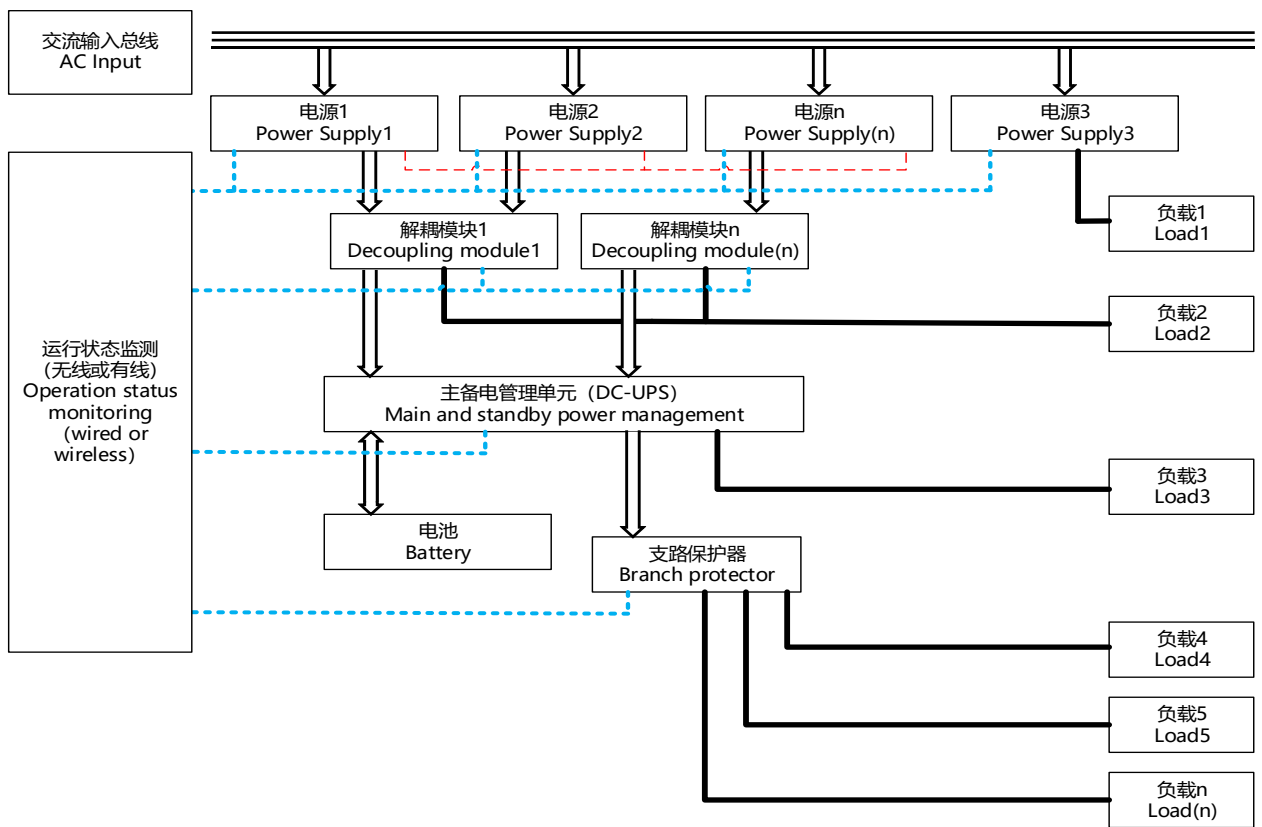


6. 导轨安装方法 Din track mounting:

- (1) To mount the Block on a DI track, hook portion (A) of the Block onto the track and press the Block in direction (B).
 安装：将(A)部分挂入导轨，朝(B)方向按压卡入导轨

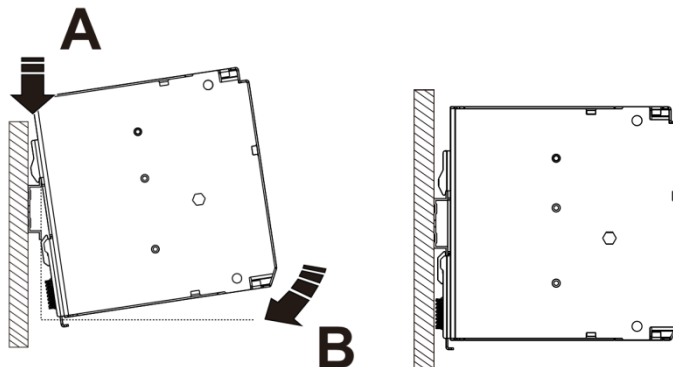

(2) To dismount the Block, pull down portion (C) with a flat-blade screw-driver and pull out the Block.

拆卸：用平口螺丝刀下拉 (C)部分拆卸电源

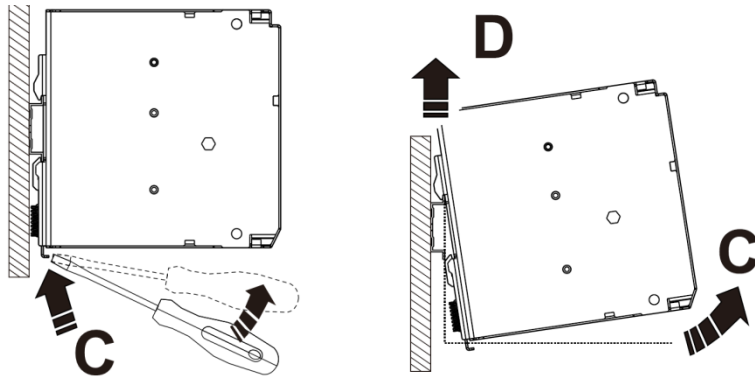

(3)通用壁挂式安装图 Mounting the universal wall adapter

